





DING BO

GZ Electromagnetic Vibration Feeder

Yield:5-600t/h
Feed particle size: 0-300mm

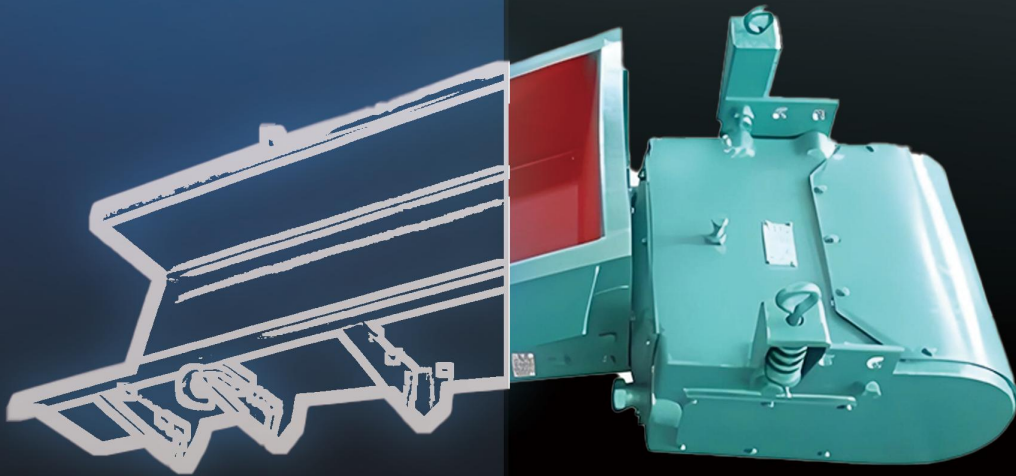

Craftsmanship
Shape the reputation of trust

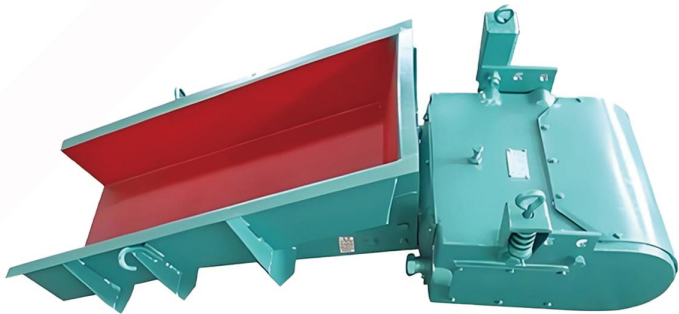

Yield: 5-600t/h

Feed particle size: 0-300mm

Power: 0.06-5.5kw


Application

Mining, metallurgy, coal, building materials, chemical, power, grain, machinery and other industries.

Raw Materials

Its main purpose is to uniformly and continuously or quantitatively feed block, granular, and powdered materials from storage silos or other storage equipment to the receiving equipment.



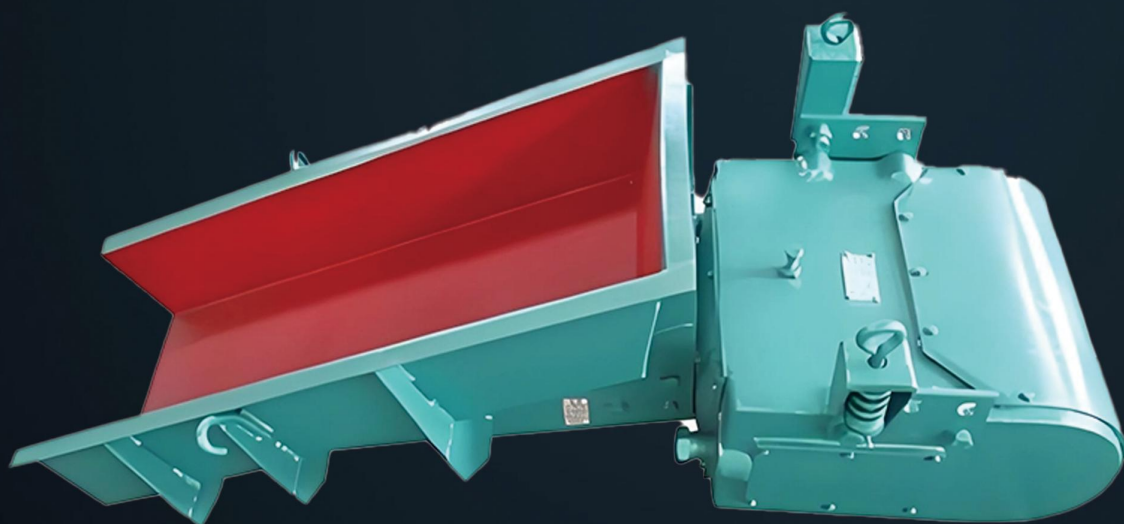



Technical Parameters

| Type | Model | Production Rate (t/h) | Particle Size (mm) | Amplitude (mm) | Power (KW) | Voltage (V) | Current (A) | Matching Control Box | Working Current | Indicated Current |
|---------------|-------|-----------------------|--------------------|----------------|------------|-------------|-------------|----------------------|-----------------|-------------------|
| Basic Type | DZ 1 | 5 | 7 | 50 | 1.75 | 220 | 1.34 | 1 | XKZ-5G2K | |
| | DZ 2 | 10 | 14 | 50 | | 0.15 | | 3.0 | 2.3 | |
| | DZ 3 | 25 | 35 | 75 | | 0.2 | | 4.58 | 3.8 | XKZ-10G2X |
| | DZ 4 | 50 | 70 | 100 | | 0.45 | | 8.4 | 7 | XKZ-20G2X |
| | DZ 5 | 100 | 140 | 150 | | 0.65 | | 12.7 | 10.6 | |
| | DZ 6 | 150 | 210 | 200 | 1.5 | 1.2 | 380 | 16.4 | 13.3 | XKZ-20G3X |
| | DZ 7 | 250 | 350 | 250 | | 3 | | 24.6 | 20 | XKS-100G3X |
| | DZ 8 | 400 | 560 | 300 | | 5.5 | | 39.04 | 32 | |
| Enclosed Type | DZ 1F | 4 | 5.6 | 40 | 1.75 | 0.06 | 220 | 1.34 | 1 | XKZ-5G2X |
| | DZ 2F | 8 | 11.2 | 40 | | 0.15 | | 3.0 | 2.3 | |
| | DZ 3F | 20 | 28 | 60 | | 0.2 | | 4.58 | 3.8 | XKZ-10C5X |
| | DZ 4F | 40 | 56 | 60 | | 0.45 | | 8.4 | 7 | XKZ-20G2 |

Notice: Any change of technical data shall not be advised additionally.



DING BO

Whatsapp:+8613817259661

E-mail:sales@dingbocrusher.net

Official website:<https://www.shdingbo.com>

Address:No.365, Chuanhong Road, Pudong New Area, Shanghai, China

